



SPECIFICATION
FOR
LCD Module
KD028QVFMA017-TP

MODULE:	KD028QVFMA017-TP
CUSTOMER:	

REV	DESCRIPTION	DATE
1.0	FIRST ISSUE	2016.08.25

STARTEK	INITIAL	DATE
PREPARED BY		
CHECKED BY		
APPROVED BY		

CUSTOMER	INITIAL	DATE
APPROVED BY		

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 1 of 32
常备库存 Stock for Sale	长期供货 Long-timeSupply	支持小量 No MOQ	品种齐全 In full range	



Contents

1. Block Diagram.....	5
2. Outline dimension.....	6
3. Input terminal Pin Assignment	7
4. LCD Optical Characteristics	9
4.1 Optical specification	9
4.2 Measuring Condition.....	9
4.3 Measuring Equipment.....	9
5. Electrical Characteristics.....	12
5.1 Absolute Maximum Rating (Ta=25 VSS=0V).....	12
5.2 DC Electrical Characteristics.....	12
5.3 LED Backlight Characteristics	13
6. TP Feature	15
6.1 Conditions of use and storage	15
6.2 Electrical property.....	15
6.3 Mechanical property	16
6.4 Optical property.....	16
7. AC Characteristic	17
7.1 Display Parallel 8/16-bit Interface Timing Characteristics (8080 system).....	17
7.2 Display Serial Interface Timing Characteristics (3-line SPI system).....	19
7.3 Display Serial Interface Timing Characteristics (4-line SPI system).....	20
7.4 Parallel RGB Interface Timing Characteristics.....	21
7.5 Reset Timing Characteristics	22
8. LCD Module Out-Going Quality Level	24
8.1 VISUAL & FUNCTION INSPECTION STANDARD	24
8.1.1 Inspection conditions	24
8.1.2 Definition	24
8.1.3 Sampling Plan.....	25
8.1.4 Criteria (Visual)	26
9. Reliability Test Result	30
9.1 Condition	30
10. Cautions and Handling Precautions	31
10.1 Handling and Operating the Module	31
10.2 Storage and Transportation.....	31
11. Packing	32

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 3 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply	支持小量 No MOQ	品种齐全 In full range	



* Description

This is a color active matrix TFT (Thin Film Transistor) LCD (liquid crystal display) that uses amorphous silicon TFT as a switching device. This model is composed of a Transmissive type TFT-LCD Panel, driver circuit, back-light unit. The resolution of a 2.8''TFT-LCD contains 240x320 pixels, and can display up to 65K/262K colors.

* Features

- Low Input Voltage: 3.3V(TYP)
- Display Colors of TFT LCD: 65K/262K colors
- Interface: 8/9/16/18Bit MCU Interface
3/4SPI+16/18Bit RGB Interface
3-line/4-line Serial Interface

General Information Items	Specification	Unit	Note
	Main Panel		
Display area(AA)	43.2(H)*57.6(V) (2.8inch)	mm	-
Driver element	TFT active matrix	-	-
Display colors	65K/262K	colors	-
Number of pixels	240(RGB)*320	dots	-
Pixel arrangement	RGB vertical stripe	-	-
Pixel pitch	0.060(H)*0.180(V)	mm	-
Viewing angle	ALL	o'clock	-
Controller IC	ST7789V	-	-
Display mode	Transmissive/Normally Black	-	-
Operating temperature	-20~+70	°C	-
Storage temperature	-30~+80	°C	-


* Mechanical Information

Item	Min.	Typ.	Max.	Unit	Note
Module size	Horizontal(H)		50.5	mm	-
	Vertical(V)		69.7	mm	-
	Depth(D)		2.6	mm	-
Weight		TBD		g	-

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 4 of 32
常备库存 Stock for Sale	长期供货 Long-timeSupply	支持小量 No MOQ	品种齐全 In full range	



1. Block Diagram

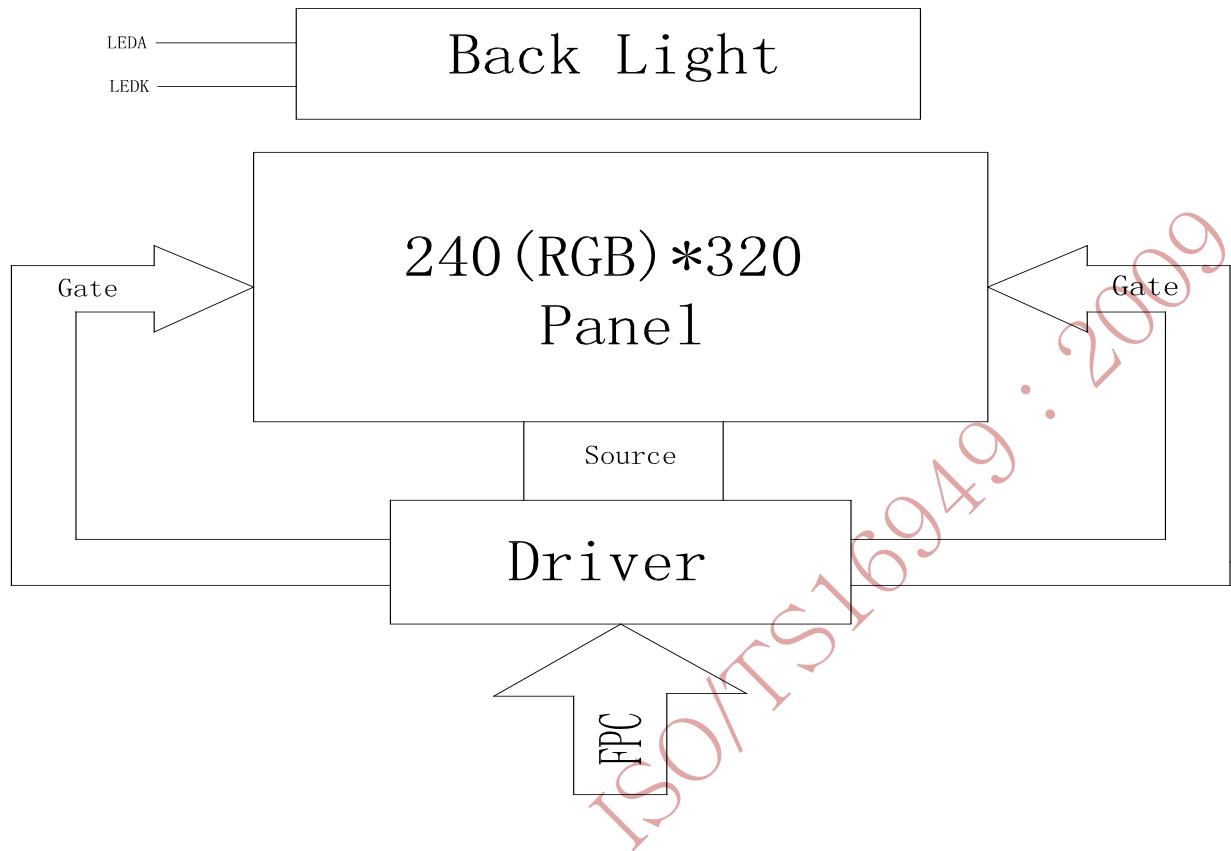


ISO9001:2008

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 5 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply	支持小量 No MOQ	品种齐全 In full range	



2. Outline dimension

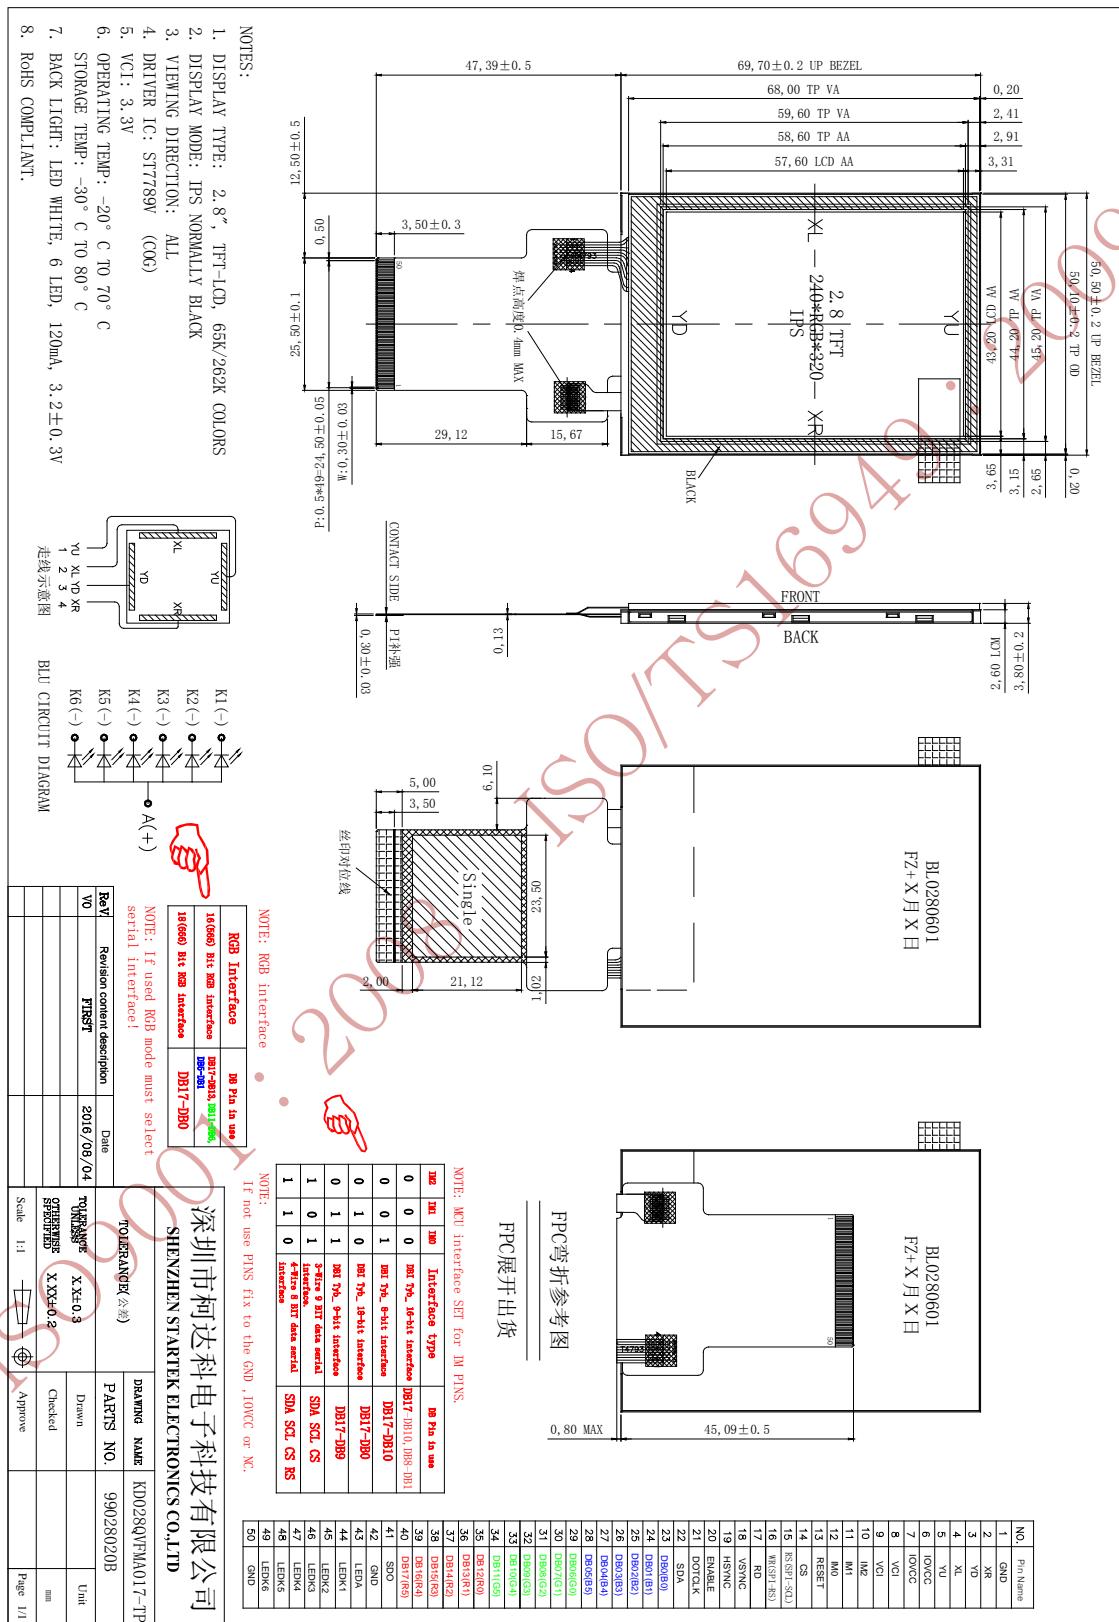

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 6 of 32
----------	------------------	-----	------	--------------

常备库存
Stock for Sale长期供货
Long-time Supply支持小量
No MOQ品种齐全
In full range



3. Input terminal Pin Assignment

NO.	SYMBOL	DISCRIPTION	I/O
1	GND	Ground.	P
2	XR	Touch panel Right Glass Terminal	A/D
3	YD	Touch panel Bottom Film Terminal	A/D
4	XL	Touch panel LIFT Glass Terminal	A/D
5	YU	Touch panel Top Film Terminal	A/D
6	IOVCC	Supply voltage(1.65-3.3V).	P
7	IOVCC	Supply voltage(1.65-3.3V).	P
8	VCI	Supply voltage(3.3V).	P
9	VCI	Supply voltage(3.3V).	P
10	IM2	MPU Parallel interface bus and serial interface select If use RGB Interface must select serial interface. Fix this pin at VCI and GND.	I
11	IM1		I
12	IM0		I
13	RESET	This signal will reset the device and must be applied to properly initialize the chip.	I
14	CS	Chip select input pin ("Low" enable). fix this pin at VCI or GND when not in use.	I
15	RS(SPI-SCL)	-Display data/command selection pin in parallel interface. -This pin is used to be serial interface clock. DC='1': display data or parameter. DC='0': command data. -If not used, please fix this pin at VDDI or DGND.	I
16	WR(SPI-RS)	-Write enable in MCU parallel interface. - Display data/command selection pin in 4-line serial interface. - Second Data lane in 2 data lane serial interface. -If not used, please fix this pin at VDDI or DGND.	I
17	RD	Serves as a read signal and MCU read data at the rising edge. fix this pin at VCI or GND when not in use.	I
18	VSYNC	Frame synchronizing signal for RGB interface operation. fix this pin at VCI or GND when not in use.	I

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 7 of 32
----------	------------------	-----	------	--------------



19	H SYNC	Line synchronizing signal for RGB interface operation. fix this pin at VCI or GND when not in use.	I
20	ENABLE	Data enable signal for RGB interface operation. fix this pin at VCI or GND when not in use.	I
21	DOTCLK	Dot clock signal for RGB interface operation. Fix this pin at VCI or GND when not in use.	I
22	SDA	Serial input signal. The data is latched on the rising edge of the SCL signal. fix this pin at VCI or GND when not in use.	I
23-40	DB0-DB17	18-bit parallel bi-directional data bus for MCU system and RGB interface mode . Fix to GND level when not in use	I/O
41	SDO	SPI interface output pin. -The data is output on the falling edge of the SCL signal. -If not used, let this pin open.	O
42	GND	Ground.	P
43	LEDA	Anode pin of backlight	P
44	LEDK1	Cathode pin OF backlight	P
45	LEDK2	Cathode pin OF backlight	P
46	LEDK3	Cathode pin OF backlight	P
47	LEDK4	Cathode pin OF backlight	P
48	LEDK5	Cathode pin OF backlight	P
49	LEDK6	Cathode pin OF backlight	P
50	GND	Ground.	P



4. LCD Optical Characteristics

4.1 Optical specification

Item	Symbol	Condition	Min.	Typ.	Max.	Unit.	Note
Contrast Ratio	CR	$\Theta=0$ Normal viewing angle	350	500			
Response time	Rising		--	35	45	msec	
	Falling	T_F					
Color gamut	S(%)		--	70	--	%	
Color Filter Chromacity	White	W_X	0.285	0.300	0.315		
		W_Y	0.310	0.325	0.340		
	Red	R_X	0.641	0.656	0.671		
		R_Y	0.312	0.327	0.342		
	Green	G_X	0.273	0.288	0.303		
		G_Y	0.578	0.593	0.608		
	Blue	B_X	0.123	0.138	0.153		
		B_Y	0.093	0.108	0.123		
	Viewing angle	Θ_L	70	80	--		
		Θ_R	70	80	--		
		Θ_U	70	80	--		
		Θ_D	70	80	--		
Option View Direction						Free	

4.2 Measuring Condition

- Measuring surrounding: dark room
- Ambient temperature: $25\pm2^\circ\text{C}$
- 15min. warm-up time.

4.3 Measuring Equipment

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 9 of 32
常备库存 Stock for Sale	长期供货 Long-timeSupply	支持小量 No MOQ	品种齐全 In full range	



1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIG.2).

2. Contrast measurements shall be made at viewing angle of $\Theta = 0^\circ$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIG. 2) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Transmittance is the value with Polarizer.

4. The color chromaticity coordinates specified in Table1 shall be calculated from

The spectral data measured with all pixels first in red, green, blue and white.


Measurements shall be made at the center of the C/F.

Measurement condition is C - light source & Halogen Lamp



5. The electro-optical response time measurements shall be made as FIG.3 by switching the "data" input signal ON and OFF.

The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_f .

Figure 1. The definition of V_{th} & V_{sat}

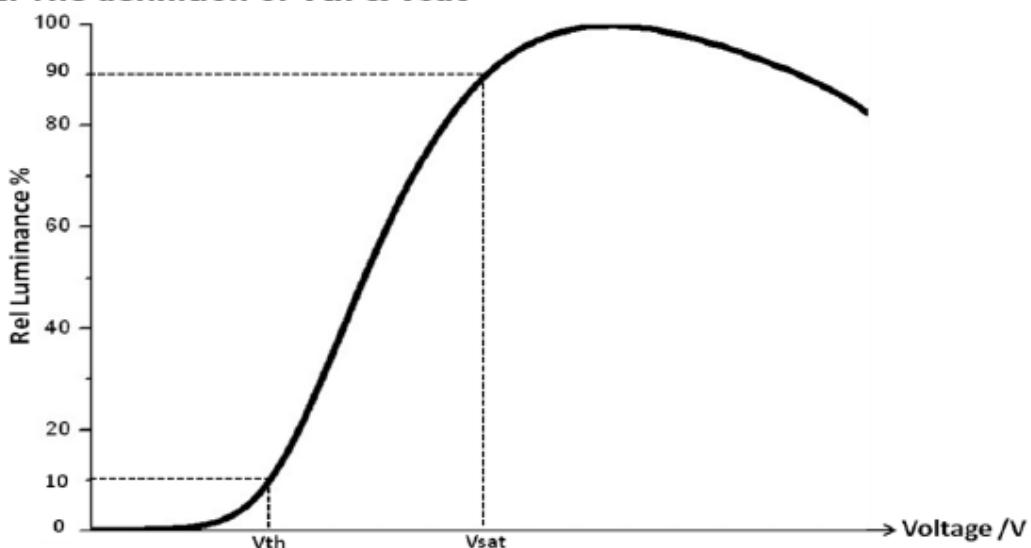

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 10 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply	支持小量 No MOQ	品种齐全 In full range	

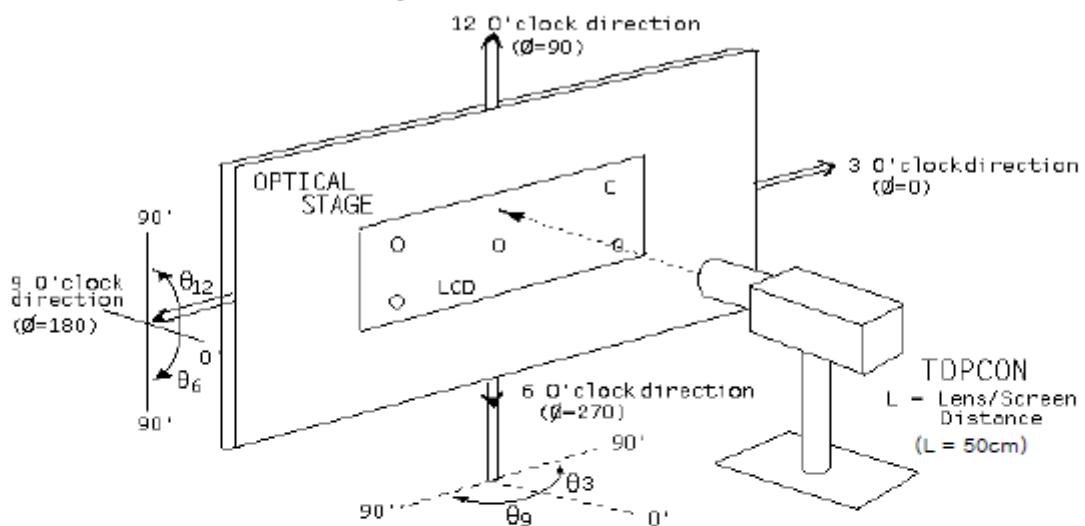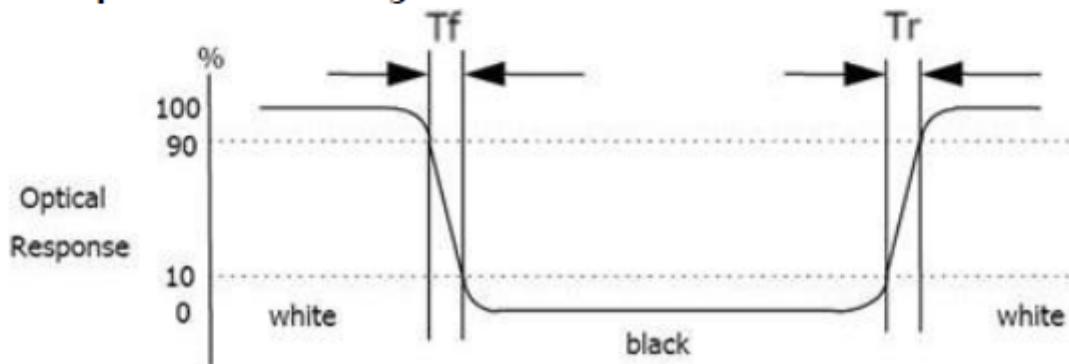**Figure 2. Measurement Set Up****Figure 3. Response Time Testing**

ISO9001:2002

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 11 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply	支持小量 No MOQ	品种齐全 In full range	



5. Electrical Characteristics

5.1 Absolute Maximum Rating (Ta=25 VSS=0V)

Characteristics	Symbol	Min.	Max.	Unit
Digital Supply Voltage	VDD	-0.3	4.6	V
Digital interface supple Voltage	VDDIO	-0.3	4.6	V
Operating temperature	T _{OP}	-20	+70	°C
Storage temperature	T _{ST}	-30	+80	°C

NOTE: If the absolute maximum rating of even is one of the above parameters is exceeded even momentarily, the quality of the product may be degraded. Absolute maximum ratings, therefore, specify the values exceeding which the product may be physically damaged. Be sure to use the product within the range of the absolute maximum ratings.

5.2 DC Electrical Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Note
Digital Supply Voltage	VDD	2.4	2.8	3.3	V	
Digital interface supple Voltage	VDDIO	1.65	1.8	3.3	V	
Normal mode Current consumption	IDD	--	7	--	mA	
Level input voltage	V _{IH}	0.7VDDIO		VDDIO	V	
	V _{IL}	GND		0.3VDDIO	V	
Level output voltage	V _{OH}	0.8VDDIO		VDDIO	V	
	V _{OL}	GND		0.2VDDIO	V	

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 12 of 32
----------	------------------	-----	------	---------------



5.3 LED Backlight Characteristics


The back-light system is edge-lighting type with 6 chips White LED

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Forward Current	I_F	100	120	--	mA	
Forward Voltage	V_F	--	3.2	--	V	
LCM Luminance	L_V	450	--	--	cd/m ²	Note3
LED life time	Hr	50000	--	--	Hour	Note1,2
Uniformity	AVg	80	--	--	%	Note3

Note (1) LED life time (Hr) can be defined as the time in which it continues to operate under the condition:

$T_a=25\pm3$ °C, typical IL value indicated in the above table until the brightness becomes less than 50%.

Note (2) The “LED life time” is defined as the module brightness decrease to 50% original brightness at $T_a=25$ °C and $IL=120mA$. The LED lifetime could be decreased if operating IL is larger than 120mA. The constant current driving method is suggested.

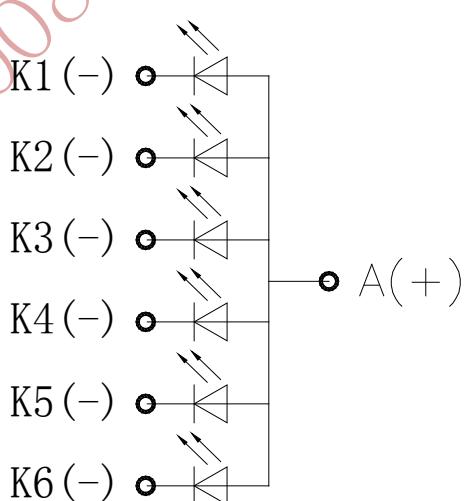


BLU CIRCUIT DIAGRAM

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 13 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply	支持小量 No MOQ	品种齐全 In full range	



NOTE 3: Luminance Uniformity of these 9 points is defined as below:

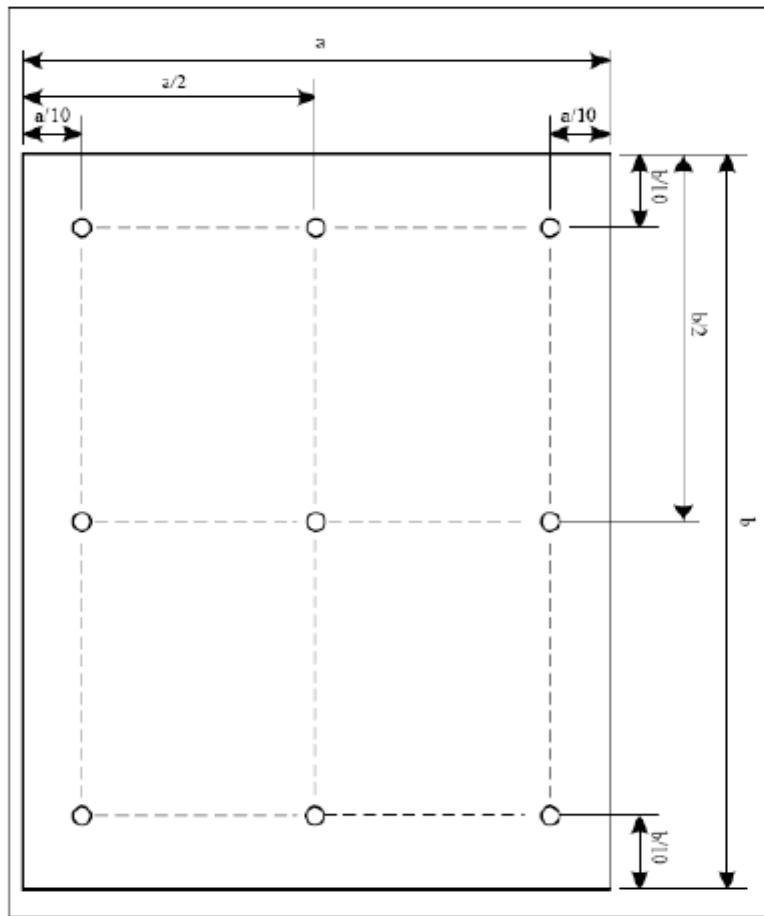

$$\text{Uniformity} = \frac{\text{minimum luminance in 9 points (1-9)}}{\text{maximum luminance in 9 points (1-9)}}$$

$$\text{Luminance} = \frac{\text{Total Luminance of 9 points}}{9}$$

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 14 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply		支持小量 No MOQ	品种齐全 In full range




6. TP Feature

6.1 Conditions of use and storage

Item	Value(condition)	Note
Temperature range upon operation	Humidity: 20%~90% non dew, condensation -20°C~70°C	In a simple substance
Temperature range upon storage	Humidity: 20%~90% non dew, condensation -30°C~80°C	In a simple substance

6.2 Electrical property

Item	Value	Note
Maximum voltage	DC5V	
Resistance between terminals	X direction[Film side]:200-600Ω	
	Y direction [Glass side]:300-900Ω	
Insulation resistance	DC 25V 20MΩ or above	Connect X + ~X- and Y+ ~Y-, apply 25VDC Between X and Y for perform measurements
Chattering	10 msec or below	
Rating	Voltage is DC 5V	

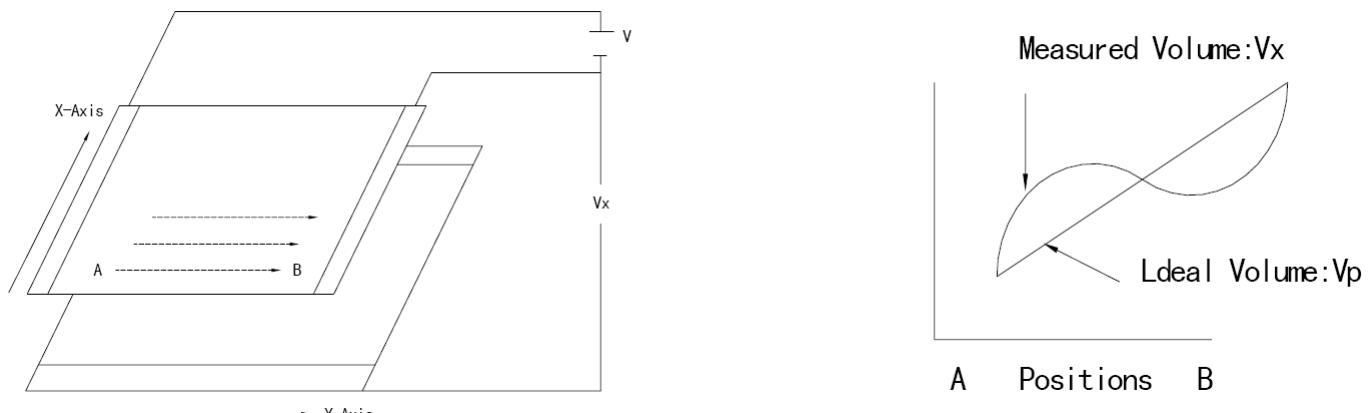



6.3 Mechanical property

Item	Performance		Note
Input method	Used of an exclusive pen or finger		
Load upon operation	Exclusive pen	60-100g or below	Operation and measurement with a pen must be carried out under the following tip conditions: Stylus pen material : POM(ployacetal). Tip : Diameter 3.0mm, SR 0.8 mm
	Finger	60-100g or below	Operations and measurement methods simulated for a finger must be carried out under the following tip conditions. Material :Silicon rubber (Hardness : 30°Hs) Tip : Diameter 12.0 mm, SR 12.5mm
Surface hardness	Pencil hardness : 3H or above		It complies with the way of test method JIS K5400.

6.4 Optical property

Item	Performance	Note
Total light transmittance	80% or above	JIS K7105
Haze	5% or below	JIS K7136
Film specification	Polished type with hard coated surface	

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 16 of 32
----------	------------------	-----	------	---------------

常备库存
Stock for Sale

长期供货
Long-timeSupply


支持小量
No MOQ

品种齐全
In full range




7. AC Characteristic

7.1 Display Parallel 8/16-bit Interface Timing Characteristics (8080 system)

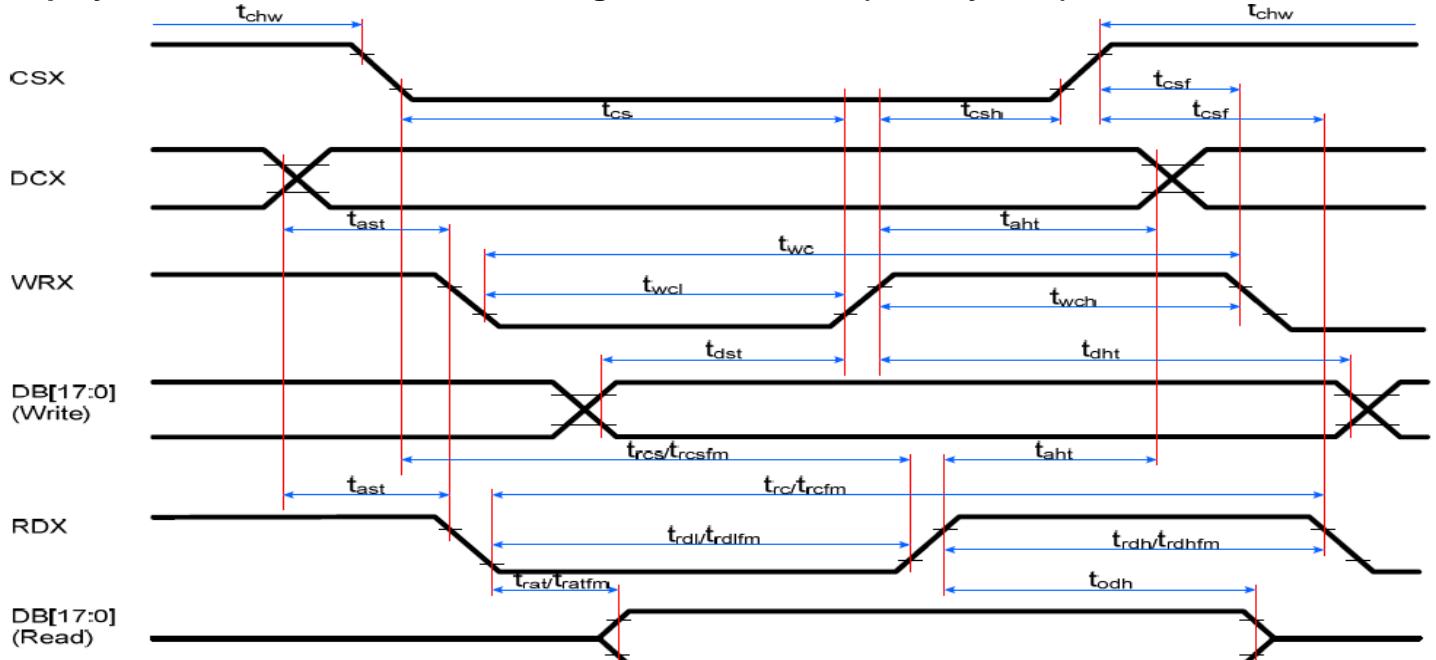


Signal	Symbol	Parameter	min	max	Unit	Description
DCX	tast	Address setup time	0	-	ns	
	taht	Address hold time (Write/Read)	10	-	ns	
CSX	tchw	CSX "H" pulse width	0	-	ns	
	tcs	Chip Select setup time (Write)	15	-	ns	
	trcs	Chip Select setup time (Read ID)	45	-	ns	
	trcsfm	Chip Select setup time (Read FM)	355	-	ns	
	tcsf	Chip Select Wait time (Write/Read)	10	-	ns	
WRX	twc	Write cycle	66	-	ns	
	twrh	Write Control pulse H duration	15	-	ns	
	twrl	Write Control pulse L duration	15	-	ns	
RDX (FM)	trcfm	Read Cycle (FM)	450	-	ns	
	trdhfm	Read Control H duration (FM)	90	-	ns	
	trdlfm	Read Control L duration (FM)	355	-	ns	
RDX (ID)	trc	Read cycle (ID)	160	-	ns	
	trdh	Read Control pulse H duration	90	-	ns	
	trdl	Read Control pulse L duration	45	-	ns	
D[17:0], D[15:0], D[8:0], D[7:0]	tdst	Write data setup time	10	-	ns	For maximum CL=30pF For minimum CL=8pF
	tdht	Write data hold time	10	-	ns	
	trat	Read access time	-	40	ns	
	tratfm	Read access time	-	340	ns	
	trod	Read output disable time	20	80	ns	

Note: $T_a = -30$ to 70 °C, $IOVCC=1.65V$ to $2.8V$, $VCI=2.6V$ to $3.3V$, $GND=0V$

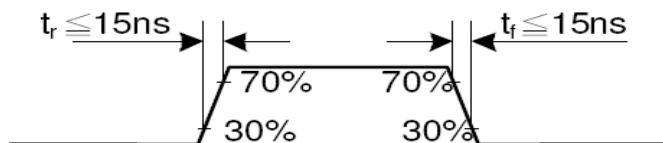




CSX timings :

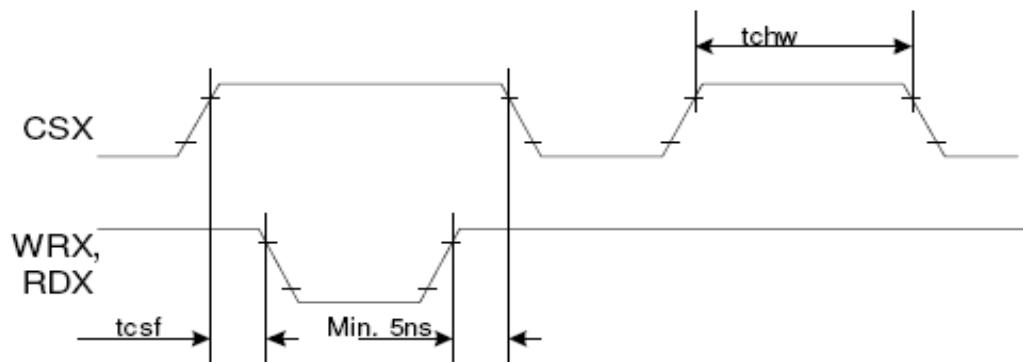

Note: Logic high and low levels are specified as 30% and 70% of IOVCC for Input signals.

Write to read or read to write timings:

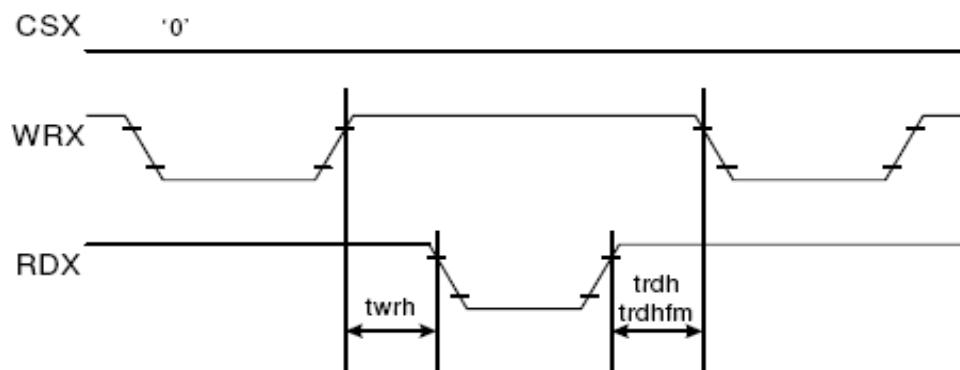


Note: Logic high and low levels are specified as 30% and 70% of IOVCC for Input signals.

ISO9000

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 18 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply	支持小量 No MOQ	品种齐全 In full range	



7.2 Display Serial Interface Timing Characteristics (3-line SPI system)

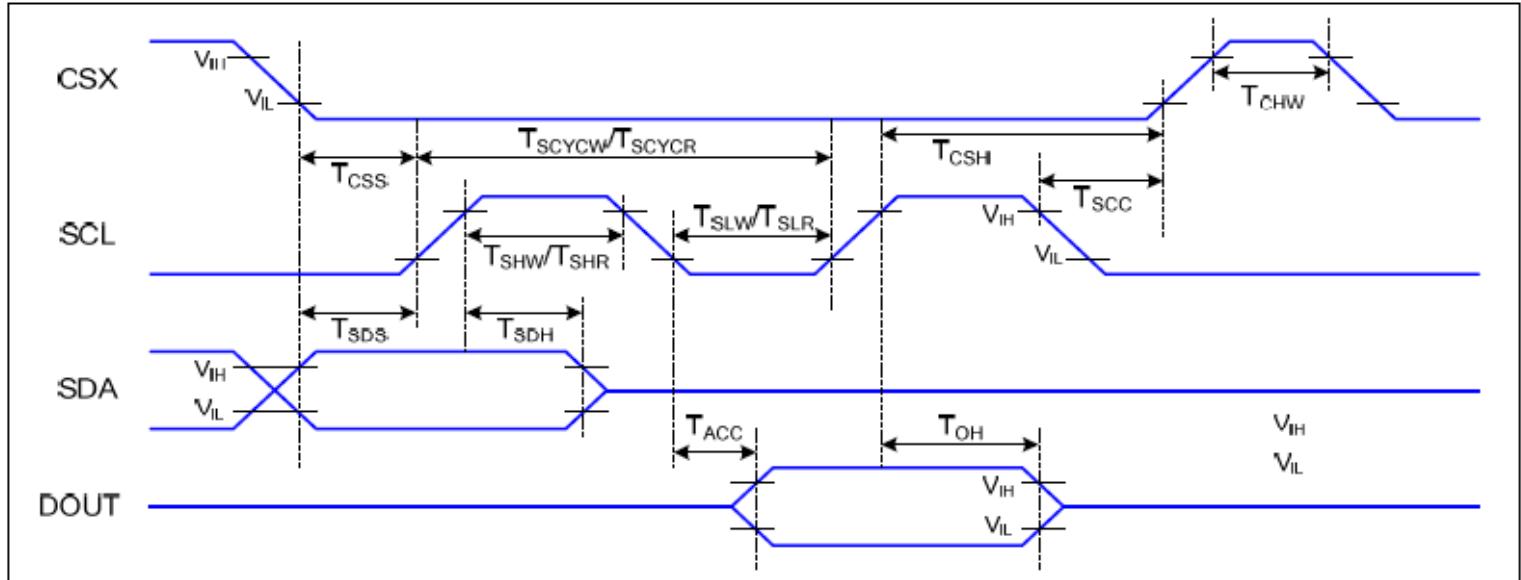


VDDI=1.65 to 3.3V, VDD=2.4 to 3.3V, AGND=DGND=0V, Ta=-30 to 70 °C

Signal	Symbol	Parameter	Min	Max	Unit	Description
CSX	T _{CSST}	Chip select setup time (write)	15		ns	
	T _{CSS}	Chip select hold time (write)	15		ns	
	T _{CSST}	Chip select setup time (read)	60		ns	
	T _{SCC}	Chip select hold time (read)	65		ns	
	T _{CHW}	Chip select "H" pulse width	40		ns	
SCL	T _{SCYCW}	Serial clock cycle (Write)	66		ns	
	T _{SHW}	SCL "H" pulse width (Write)	15		ns	
	T _{SLW}	SCL "L" pulse width (Write)	15		ns	
	T _{SCYCR}	Serial clock cycle (Read)	150		ns	
	T _{SHR}	SCL "H" pulse width (Read)	60		ns	
	T _{SLR}	SCL "L" pulse width (Read)	60		ns	
SDA (DIN)	T _{SDS}	Data setup time	10		ns	
	T _{SDH}	Data hold time	10		ns	
DOUT	T _{ACC}	Access time	10	50	ns	For maximum CL=30pF
	T _{OH}	Output disable time	15	50	ns	For minimum CL=8pF

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 19 of 32
----------	------------------	-----	------	---------------



7.3 Display Serial Interface Timing Characteristics (4-line SPI system)

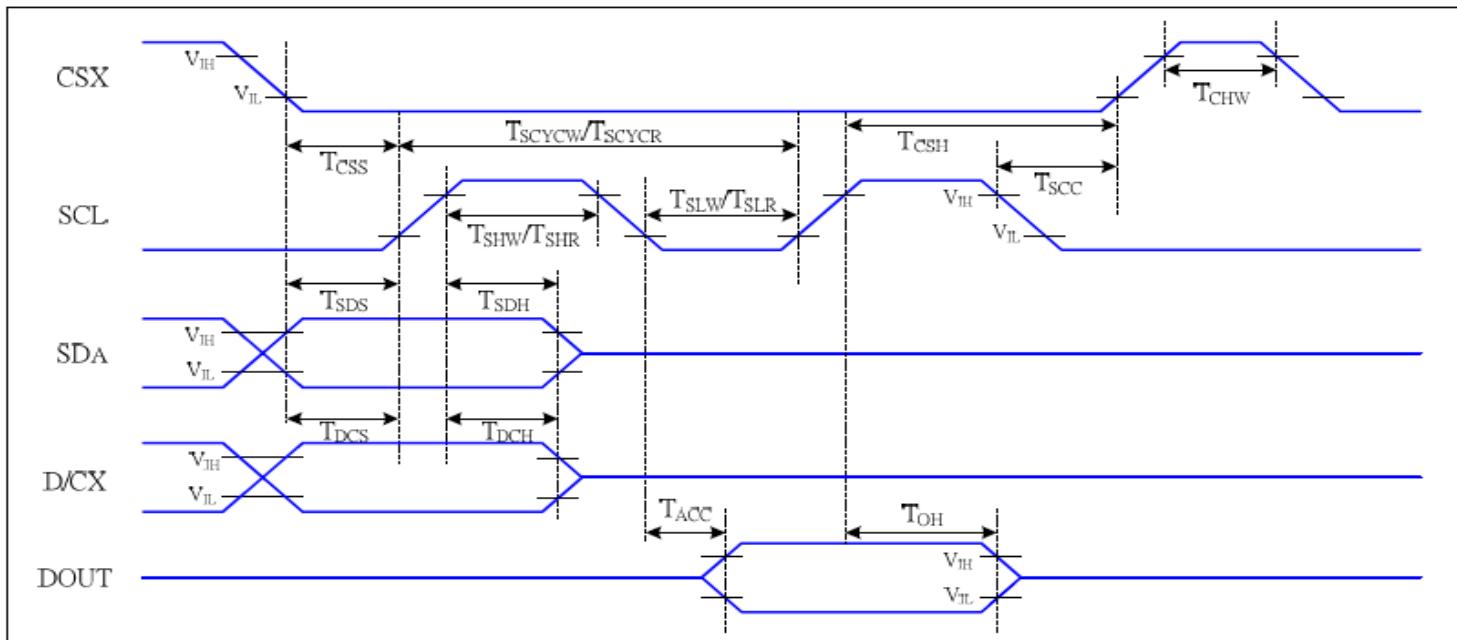


VDDI=1.65 to 3.3V, VDD=2.4 to 3.3V, AGND=DGND=0V, Ta=-30 to 70 °C

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
CSX	T _{css}	Chip select setup time (write)	15		ns	
	T _{csy}	Chip select hold time (write)	15		ns	
	T _{css}	Chip select setup time (read)	60		ns	
	T _{scc}	Chip select hold time (read)	65		ns	
	T _{chw}	Chip select "H" pulse width	40		ns	
SCL	T _{scycw}	Serial clock cycle (Write)	66		ns	-write command & data ram
	T _{shw}	SCL "H" pulse width (Write)	15		ns	
	T _{slw}	SCL "L" pulse width (Write)	15		ns	
	T _{scycr}	Serial clock cycle (Read)	150		ns	-read command & data ram
	T _{shr}	SCL "H" pulse width (Read)	60		ns	
	T _{slr}	SCL "L" pulse width (Read)	60		ns	
D/CX	T _{dcs}	D/CX setup time	10		ns	
	T _{dch}	D/CX hold time	10		ns	
SDA (DIN)	T _{sds}	Data setup time	10		ns	
	T _{sdh}	Data hold time	10		ns	
DOUT	T _{acc}	Access time	10	50	ns	For maximum CL=30pF
	T _{oh}	Output disable time	15	50	ns	



7.4 Parallel RGB Interface Timing Characteristics

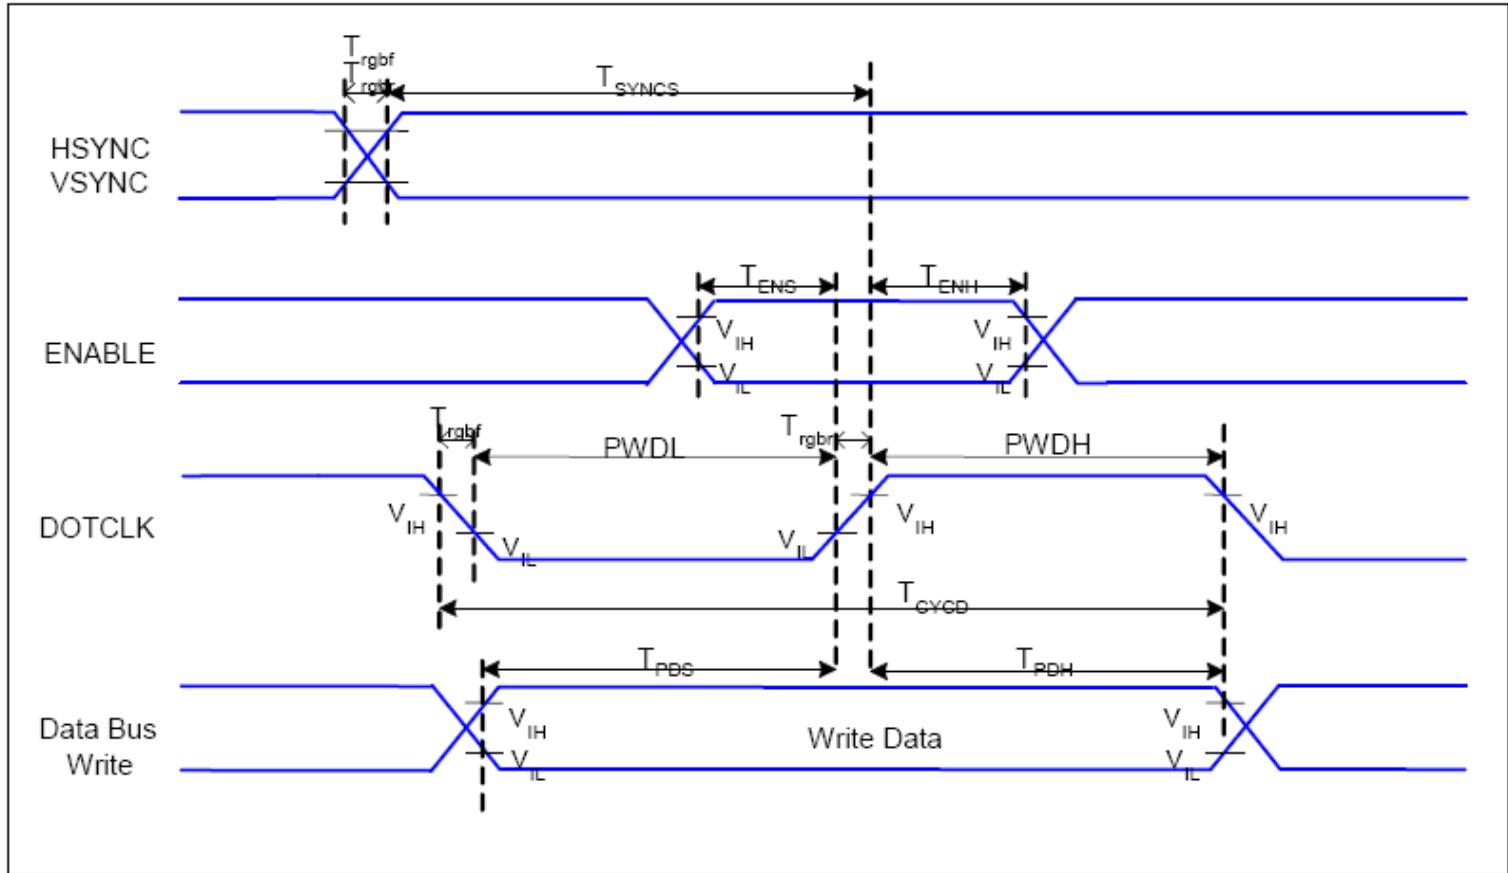


$VDDI=1.65 \text{ to } 3.3V, VDD=2.4 \text{ to } 3.3V, AGND=DGND=0V, Ta=-30 \sim 70^\circ C$

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
HSYNC, VSYNC	T_{SYNCS}	VSYNC, HSYNC Setup Time	30	-	ns	
ENABLE	T_{ENS}	Enable Setup Time	25	-	ns	
	T_{ENH}	Enable Hold Time	25	-	ns	
DOTCLK	T_{PWDH}	DOTCLK High-level Pulse Width	60	-	ns	
	T_{PWDL}	DOTCLK Low-level Pulse Width	60	-	ns	
	T_{CYCD}	DOTCLK Cycle Time	120	-	ns	
	Trghr, Trghf	DOTCLK Rise/Fall time	-	20	ns	
DB	T_{PBS}	PD Data Setup Time	50	-	ns	
	T_{PDH}	PD Data Hold Time	50	-	ns	



7.5 Reset Timing Characteristics

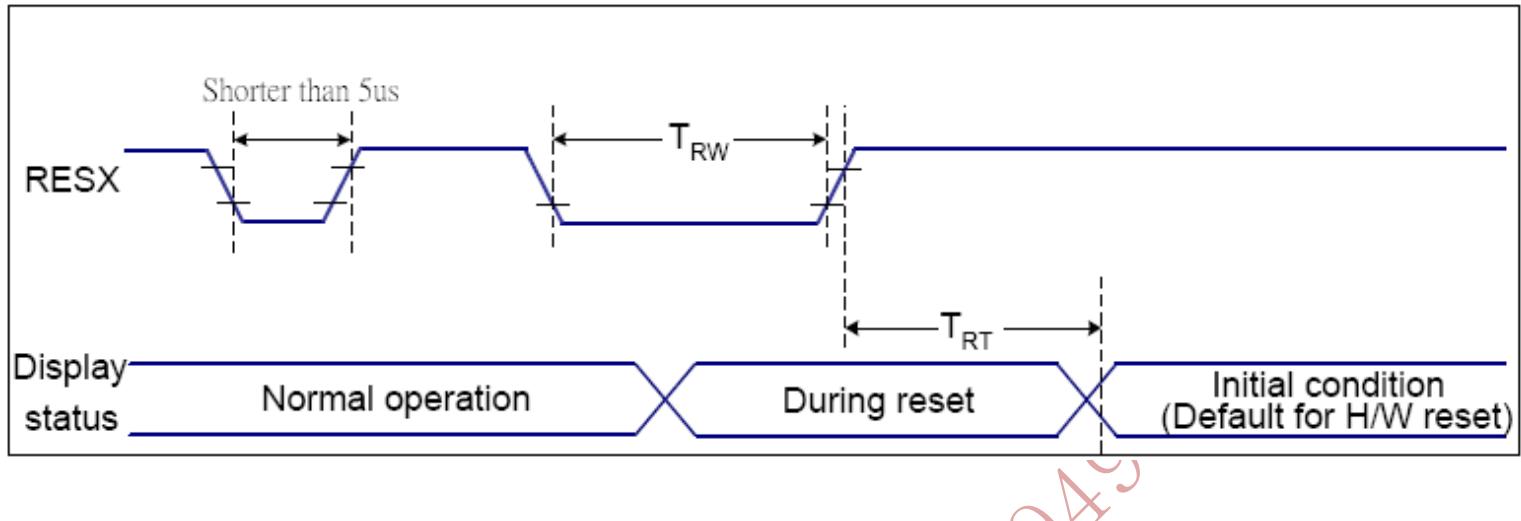

$VDDI=1.65 \text{ to } 3.3V, VDD=2.4 \text{ to } 3.3V, AGND=DGND=0V, Ta=-30 \sim 70 ^\circ C$

Related Pins	Symbol	Parameter	MIN	MAX	Unit
RESX	TRW	Reset pulse duration	10	-	us
	TRT	Reset cancel	-	5 (Note 1, 5)	ms
				120 (Note 1, 6, 7)	ms

Notes:


1. The reset cancel includes also required time for loading ID bytes, VCOM setting and other settings from NVM (or similar device) to registers. This loading is done every time when there is HW reset cancel time (t_{RT}) within 5 ms after a rising edge of RESX.
2. Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below:

RESX Pulse	Action
Shorter than 5us	Reset Rejected
Longer than 9us	Reset
Between 5us and 9us	Reset starts

3. During the Resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out -mode. The display remains the blank state in Sleep In -mode.) and then return to Default condition for Hardware Reset.

4. Spike Rejection also applies during a valid reset pulse as shown below:

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 22 of 32
常备库存 Stock for Sale	长期供货 Long-timeSupply	支持小量 No MOQ	品种齐全 In full range	

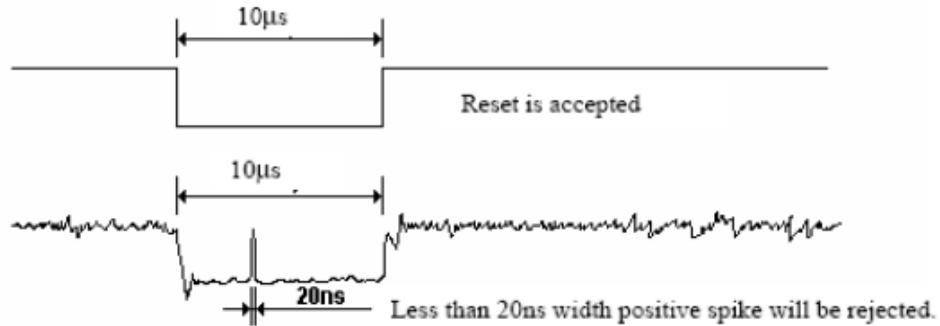

5. When Reset applied during Sleep In Mode.

6. When Reset applied during Sleep Out Mode.

7. It is necessary to wait 5msec after releasing RESX before sending commands. Also Sleep Out command cannot be sent for 120msec.

ISO9001:2008
ISO/TS16949

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 23 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply	支持小量 No MOQ	品种齐全 In full range	



8. LCD Module Out-Going Quality Level

8.1 VISUAL & FUNCTION INSPECTION STANDARD

8.1.1 Inspection conditions

Inspection performed under the following conditions is recommended.


Temperature : $25 \pm 5^\circ\text{C}$

Humidity : $65\% \pm 10\%\text{RH}$


Viewing Angle : Normal viewing Angle.

Illumination: Single fluorescent lamp (300 to 700Lux)

Viewing distance:30-50cm

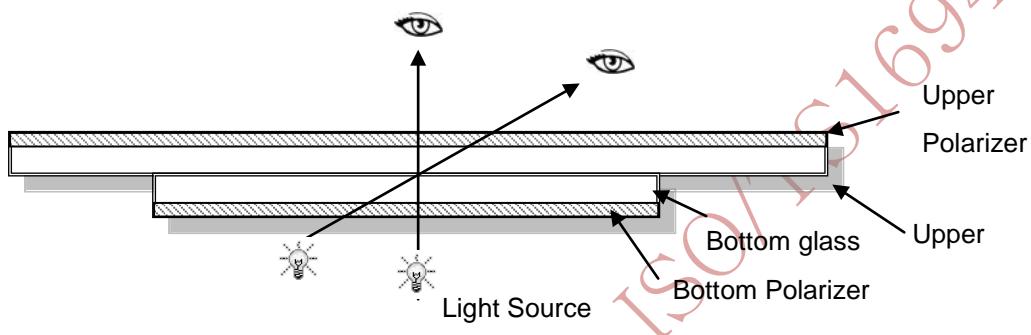

8.1.2 Definition

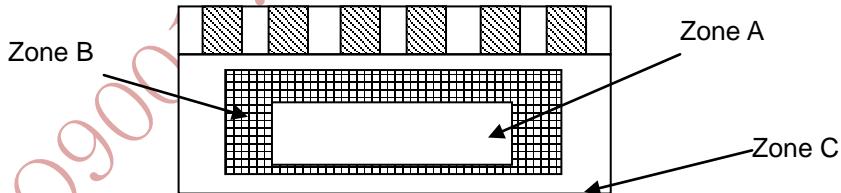

Zone A : Effective Viewing Area(Character or Digit can be seen)

Zone B : Viewing Area except Zone A

Zone C : Outside (Zone A+Zone B) which can not be seen after assembly by customer .)

Note:

As a general rule ,visual defects in Zone C can be ignored when it doesn't effect product function or appearance after assembly by customer.

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 24 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply	支持小量 No MOQ	品种齐全 In full range	



8.1.3 Sampling Plan

According to GB/T 2828-2003 ; , normal inspection, Class II

AQL:

Major defect	Minor defect
0.65	1.5




LCD: Liquid Crystal Display , TP: Touch Panel , LCM: Liquid Crystal Module

No	Items to be inspected	Criteria	Classification of defects
1	Functional defects	1) No display, Open or miss line 2) Display abnormally, Short 3) Backlight no lighting, abnormal lighting. 4) TP no function	Major
2	Missing	Missing component	
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed	
4	Color tone	Color unevenness, refer to limited sample	
5	Soldering appearance	Good soldering , Peeling off is not allowed.	Minor
6	LCD/Polarizer/TP	Black/White spot/line, scratch, crack, etc.	


Part. No	KD028QVFMA017-TP	REV	V1.0	Page 25 of 32
常备库存	Stock for Sale	长期供货	支持小量 No MOQ	品种齐全 In full range



8.1.4 Criteria (Visual)

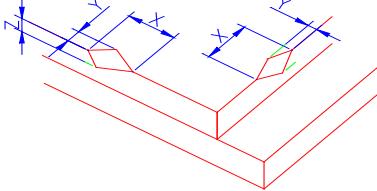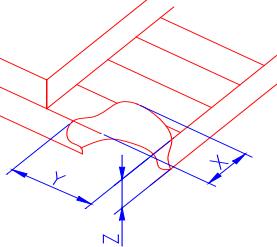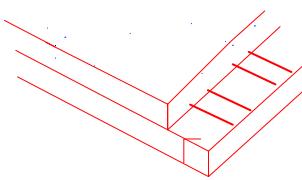Number	Items	Criteria(mm)						
1.0 LCD Crack/Broken	(1) The edge of LCD broken NOTE: X: Length Y: Width Z: Height L: Length of ITO, T: Height of LCD	 <table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>$\leq 3.0\text{mm}$</td> <td><Inner border line of the seal</td> <td>$\leq T$</td> </tr> </table>	X	Y	Z	$\leq 3.0\text{mm}$	<Inner border line of the seal	$\leq T$
X	Y	Z						
$\leq 3.0\text{mm}$	<Inner border line of the seal	$\leq T$						
	(2) LCD corner broken	 <table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>$\leq 3.0\text{mm}$</td> <td>$\leq L$</td> <td>$\leq T$</td> </tr> </table>	X	Y	Z	$\leq 3.0\text{mm}$	$\leq L$	$\leq T$
X	Y	Z						
$\leq 3.0\text{mm}$	$\leq L$	$\leq T$						
	(3) LCD crack	 <p>Crack Not allowed</p>						



Number	Items	Criteria (mm)																																																																			
2.0	Spot defect  X $\Phi = (X+Y)/2$	<p>① light dot (LCD/TP/Polarizer black/white spot , light dot, pinhole, dent, stain)</p> <table border="1"> <thead> <tr> <th rowspan="2">Zone Size (mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.10$</td> <td colspan="3">Ignore</td> </tr> <tr> <td>$0.10 < \Phi \leq 0.20$</td> <td colspan="3">3(distance $\geq 10\text{mm}$)</td> </tr> <tr> <td>$0.20 < \Phi \leq 0.25$</td> <td colspan="3">2</td> </tr> <tr> <td>$\Phi > 0.25$</td> <td colspan="3">0</td> </tr> </tbody> </table> <p>② Dim spot (LCD/TP/Polarizer dim dot, light leakage、 dark spot)</p> <table border="1"> <thead> <tr> <th rowspan="2">Zone Size (mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.1$</td> <td colspan="3">Ignore</td> </tr> <tr> <td>$0.10 < \Phi \leq 0.20$</td> <td colspan="3">3(distance $\geq 10\text{mm}$)</td> </tr> <tr> <td>$0.20 < \Phi \leq 0.30$</td> <td colspan="3">2</td> </tr> <tr> <td>$\Phi > 0.30$</td> <td colspan="3">0</td> </tr> </tbody> </table> <p>③ Polarizer accidented spot</p> <table border="1"> <thead> <tr> <th rowspan="2">Zone Size (mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.2$</td> <td colspan="3">Ignore</td> </tr> <tr> <td>$0.3 < \Phi \leq 0.5$</td> <td colspan="3">2(distance $\geq 10\text{mm}$)</td> </tr> <tr> <td>$\Phi > 0.5$</td> <td colspan="3">0</td> </tr> </tbody> </table>	Zone Size (mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.10$	Ignore			$0.10 < \Phi \leq 0.20$	3(distance $\geq 10\text{mm}$)			$0.20 < \Phi \leq 0.25$	2			$\Phi > 0.25$	0			Zone Size (mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.1$	Ignore			$0.10 < \Phi \leq 0.20$	3(distance $\geq 10\text{mm}$)			$0.20 < \Phi \leq 0.30$	2			$\Phi > 0.30$	0			Zone Size (mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.2$	Ignore			$0.3 < \Phi \leq 0.5$	2(distance $\geq 10\text{mm}$)			$\Phi > 0.5$	0			ISO9001:2009	
Zone Size (mm)	Acceptable Qty																																																																				
	A	B	C																																																																		
$\Phi \leq 0.10$	Ignore																																																																				
$0.10 < \Phi \leq 0.20$	3(distance $\geq 10\text{mm}$)																																																																				
$0.20 < \Phi \leq 0.25$	2																																																																				
$\Phi > 0.25$	0																																																																				
Zone Size (mm)	Acceptable Qty																																																																				
	A	B	C																																																																		
$\Phi \leq 0.1$	Ignore																																																																				
$0.10 < \Phi \leq 0.20$	3(distance $\geq 10\text{mm}$)																																																																				
$0.20 < \Phi \leq 0.30$	2																																																																				
$\Phi > 0.30$	0																																																																				
Zone Size (mm)	Acceptable Qty																																																																				
	A	B	C																																																																		
$\Phi \leq 0.2$	Ignore																																																																				
$0.3 < \Phi \leq 0.5$	2(distance $\geq 10\text{mm}$)																																																																				
$\Phi > 0.5$	0																																																																				
	Line defect (LCD/TP /Polarizer black/white line, scratch, stain)	Width(mm)	Length(mm)	Acceptable Qty																																																																	
				<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.03$</td> <td>Ignore</td> <td>Ignore</td> <td rowspan="3">Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.05$</td> <td>$L \leq 3.0$</td> <td>$N \leq 2$</td> </tr> <tr> <td>$0.05 < W \leq 0.08$</td> <td>$L \leq 2.0$</td> <td>$N \leq 2$</td> </tr> <tr> <td>$0.08 < W$</td> <td colspan="3">Define as spot defect</td></tr> </tbody> </table>		A	B	C	$\Phi \leq 0.03$	Ignore	Ignore	Ignore	$0.03 < W \leq 0.05$	$L \leq 3.0$	$N \leq 2$	$0.05 < W \leq 0.08$	$L \leq 2.0$	$N \leq 2$	$0.08 < W$	Define as spot defect																																																	
	A	B	C																																																																		
$\Phi \leq 0.03$	Ignore	Ignore	Ignore																																																																		
$0.03 < W \leq 0.05$	$L \leq 3.0$	$N \leq 2$																																																																			
$0.05 < W \leq 0.08$	$L \leq 2.0$	$N \leq 2$																																																																			
$0.08 < W$	Define as spot defect																																																																				



3.0	Polarizer Bubble	Zone Size (mm)	Acceptable Qty			
			A	B	C	
			$\Phi \leq 0.2$ Ignore		Ignore	
			$0.2 < \Phi \leq 0.4$ 3 (distance $\geq 10 \text{ mm}$)			
			$0.4 < \Phi \leq 0.6$ 2			
			$0.6 < \Phi$ 0			

4.0	SMT	According to IPC-A-610C class II standard . Function defect and missing part are major defect ,the others are minor defect.			
-----	-----	---	--	--	--

TP bubble/ accidented spot	Assembly deflection	Size Φ (mm)	Acceptable Qty			
			A	B	C	
			$\Phi \leq 0.1$ Ignore		Ignore	
			$0.1 < \Phi \leq 0.25$ 3 (distance \geq			
			$0.25 < \Phi \leq 0.3$ 2			
			$0.3 < \Phi$ 0			



5.0	TP Related	Newton Ring	Newton Ring area > 1/3 TP area NG							
			Newton Ring area ≤ 1/3 TP area OK	 						
		TP corner broken X : length Y : width Z : height	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>X ≤ 3.0mm</td> <td>Y ≤ 3.0mm</td> <td>Z < LCD thickness</td> </tr> </tbody> </table> <p>* Circuitry broken is not allowed.</p>	X	Y	Z	X ≤ 3.0mm	Y ≤ 3.0mm	Z < LCD thickness	
X	Y	Z								
X ≤ 3.0mm	Y ≤ 3.0mm	Z < LCD thickness								
TP edge broken X : length Y : width Z : height	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>X ≤ 6.0mm</td> <td>Y ≤ 2.0mm</td> <td>Z < LCD thickness</td> </tr> </tbody> </table> <p>* Circuitry broken is not allowed.</p>	X	Y	Z	X ≤ 6.0mm	Y ≤ 2.0mm	Z < LCD thickness			
X	Y	Z								
X ≤ 6.0mm	Y ≤ 2.0mm	Z < LCD thickness								

Criteria (functional items)

Number	Items	Criteria (mm)
1	No display	Not allowed
2	Missing segment	Not allowed
3	Short	Not allowed
4	Backlight no lighting	Not allowed
5	TP no function	Not allowed

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 29 of 32
----------	------------------	-----	------	---------------

常备库存
Stock for Sale长期供货
Long-time Supply支持小量
No MOQ品种齐全
In full range



9. Reliability Test Result

9.1 Condition

Item	Condition	Sample Size	Test Result	Note
Low Temperature Operating Life test	-20°C, 96HR	3ea	pass	-
Thermal Humidity Operating Life test	70°C 90%RH, 96HR	3ea	pass	-
Temperature Cycle ON/OFF test	-20°C ↔ 70°C, ON/OFF, 20CYC	3ea	pass	(1)
High Temperature Storage test	80°C, 96HR	3ea	pass	-
Low Temperature Storage test	-30°C, 96HR	3ea	pass	-
ESD test	150pF, 330Ω, ±6KV(Contact)/± 8KV(Air), 5 points/panel, 10 times/point	3ea	pass	
Thermal Shock Resistance	The sample should be allowed to stand the following 5 cycles of operation: TSTL for 30 minutes -> normal temperature for 5 minutes -> TSTH for 30 minutes -> normal temperature for 5 minutes, as one cycle, then taking it out and drying it at normal temperature, and allowing it stand for 24 hours	3ea	pass	
Box Drop Test	1 Corner 3 Edges 6 faces, 66cm(MEDIUM BOX)	1box	pass	-

Note (1) ON Time over 10 seconds, OFF Time under 10 seconds

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 30 of 32
常备库存 Stock for Sale	长期供货 Long-timeSupply	支持小量 No MOQ	品种齐全 In full range	



10. Cautions and Handling Precautions

10.1 Handling and Operating the Module

- (1) When the module is assembled, it should be attached to the system firmly.
Do not warp or twist the module during assembly work.
- (2) Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
- (3) Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.
- (4) Do not allow drops of water or chemicals to remain on the display surface.
If you have the droplets for a long time, staining and discoloration may occur.
- (5) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (6) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane.
Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static; it may cause damage to the CMOS ICs.
- (9) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (10) Do not disassemble the module.
- (11) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (12) Pins of I/F connector shall not be touched directly with bare hands.
- (13) Do not connect, disconnect the module in the "Power ON" condition.
- (14) Power supply should always be turned on/off by the item 6.1 Power On Sequence & 6.2 Power Off Sequence

10.2 Storage and Transportation.

- (1) Do not leave the panel in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (2) Do not store the TFT-LCD module in direct sunlight.
- (3) The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.
- (4) It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module.
In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.
- (5) This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 31 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply	支持小量 No MOQ	品种齐全 In full range	

**11. Packing**

----TBD-----

ISO9001:2008
ISO/TS16949:2009

Part. No	KD028QVFMA017-TP	REV	V1.0	Page 32 of 32
常备库存 Stock for Sale	长期供货 Long-time Supply	支持小量 No MOQ	品种齐全 In full range	